Perfect for intricate soldering.
Parfait pour les soudures complexes.
Perfecta para soldaduras complicadas.

WARNING: This product, when used for soldering and similar applications, produces chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. L370CH

Ideal for radio and TV repairs, Hi-Fi kits, electrical work, wires, speaker connections, electronic kit building.

Idéal pour réparation de radio et de télévision, nécessaires de haute idélité, travail électrique, câbles, branchements de haut-parleurs et montages électroniques.

Ideal para reparar radios y televisores, juegos de Hi-Fi (alta fidelidad), trabajos eléctricos, cables, conexiones de altavoces, construcción de juegos electrónicos.

Quick change knurl nut makes heater changes simple.

Écrou moleté à changement repide pour faciliter le changement de l'élément chauffant.

Tuerca moleteada de cambio rápido que facilita los cambios del elemento térmico.

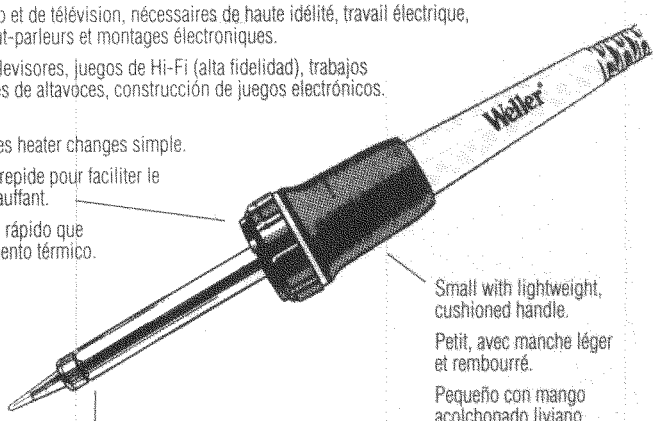

Small with lightweight, cushioned handle.

Petit, avec manche léger et rembourré.

Pequeño con mango acolchonado liviano.

Iron-plated tip and stainless steel construction give you longer tip life and greater soldering efficiency.

Pointe étamée et construction en acier inoxydable pour longue durée et soudage plus efficace.

Punta niquelada y construcción de acero inoxidable que le ofrecen una mayor durabilidad de la punta y una soldadura más eficiente.

This Weller WP series soldering iron features an interchangeable plug-in heating element. For replacement heaters please order HE25 for 25 watt, HE30 for 30 watt or HE35 for 35 watt.

Ce fer à souder de la série WP de Weller est équipé d'un élément chauffant enfichable et interchangeable. Pour les éléments de rechange, commander HE25 pour 25 watts, HE30 pour 30 watts ou HE35 for 35 watts.

Este cautín ofrece un elemento calefactor de enchufe intercambiable. Para elementos térmicos de repuesto solicite por favor HE25 para 25 vatios, HE30 para 30 vatios o HE35 para 35 vatios.

	Cat. # Nº de cat. Nº cat.	Description Description Descripción	Tip size "/mm Dim. de la pointe po/mm Tamaño de punta plg/mm	Reach "/mm Portée po/mm Extensión plg/mm
	ST1	Screwdriver tip Pointe tournevis Punta de destornillador	0.06/1.58 0,06/1,58 0,06/1,58	0.75/19.05 0,75/19,05 0,75/19,05
	ST2	Screwdriver tip Pointe tournevis Punta de destornillador	0.09/2.38 0,09/2,38 0,09/2,38	0.75/19.05 0,75/19,05 0,75/19,05
	ST3	Screwdriver tip Pointe tournevis Punta de destornillador	0.12/3.17 0,12/3,17 0,12/3,17	0.75/19.05 0,75/19,05 0,75/19,05
	ST4	Screwdriver tip Pointe tournevis Punta de destornillador	0.18/4.74 0,18/4,74 0,18/4,74	0.75/19.05 0,75/19,05 0,75/19,05
	ST5	Single flat tip Pointe plate simple Punta de cara plana	0.03/0.79 0,03/0,79 0,03/0,79	0.75/19.05 0,75/19,05 0,75/19,05
	ST6	Screwdriver tip Pointe tournevis Punta de destornillador	0.03/0.79 0,03/0,79 0,03/0,79	0.75/19.05 0,75/19,05 0,75/19,05
	ST7	Conical tip Pointe conique Punta cónica	0.03/0.79 0,03/0,79 0,03/0,79	0.75/19.05 0,75/19,05 0,75/19,05
	ST8	Narrow SD tip Pointe tournevis étroine Punta SD estrecha	0.06/1.58 0,06/1,58 0, 06/1,58	0.75/19.05 0,75/19,05 0,75/19,05